Homax®

Wall Texture

Textura para pared

ORANGE PEEL

Cáscara de naranja

GOES ON BLUE → DRIES WHITE

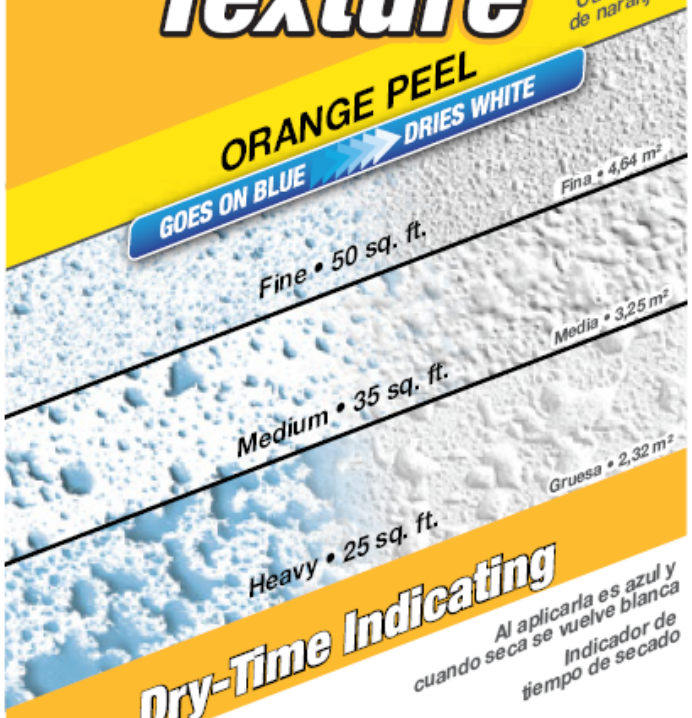

Dry-Time Indicating

Al aplicarla es azul y cuando seca se vuelve blanca
Indicador de tiempo de secado

Adjust Nozzle to Match Your Pattern for an Invisible Repair

Regule la boquilla para que corresponda a su modalidad y así obtener una reparación invisible

DANGER! FLAMMABLE VAPOR. CONTENTS UNDER PRESSURE. CAUSES EYE, SKIN AND RESPIRATORY TRACT IRRITATION. Read other cautions on side/back panel before using.

¡PELIGRO! VAPOR INFLAMABLE. CONTENIDO BAJO PRESIÓN. CAUSA IRRITACIÓN EN LOS OJOS, LA PIEL Y LAS VÍAS RESPIRATORIAS. Lea otras precauciones en el panel posterior y lateral antes de usar.

NET WT 10 OZ (284 g)

WATER BASED Base de agua

Homax® Color Changing Wall Texture sprays on blue for high visibility and easy pattern reproduction, then dries white signaling it is ready to paint. The unique dry-time indicating low odor formula is ideal for touch up projects or applying new texture to entire wall surfaces.

Watch a How-to Video at homaxproducts.com or scan this code to watch now!

Ver el Video instuctivo en homaxproducts.com o explore con su Smartphone para verlo ahora.

VENTILATE AREA WELL. PROTECT FROM OVERSPRAY. DO NOT SPRAY ON CLOTHING, FURNITURE OR CARPET.

- Water-based, use warm water for clean up.
- Sprays best between 68° and 72° F.
- For a finer texture, run can under warm water.

DIRECTIONS FOR USE: MAKE ANY NECESSARY WALL REPAIRS BEFORE APPLYING. FOR BEST RESULTS, PRIME/SEAL AREA BEFORE AND AFTER APPLYING TEXTURE.

1. Shake can vigorously for one minute.
2. Twist off safety tab from nozzle.
3. Always practice spraying on cardboard or scrap drywall to determine preferred pattern. Pointing away from face, adjust dial to desired pattern:
   - **CLOCKWISE for FINE**
   - **STRAIGHT UP for *MEDIUM***
   - **COUNTER CLOCKWISE for *HEAVY***
4. SPRAY 24"-36" from wall using a circular, or quick sweeping motion. Apply in random pattern, covering only 80-90% of surface. Shake can occasionally throughout use.
   DRY TIME: Texture can be painted over when white, signaling it is dry (approx. 30 min.). Heavier textures will require longer dry times than fine textures.
5. To store, clear nozzle by turning can upside down and spray until texture is cleared.

VENTILE BIEN EL ÁREA. PROTEJA DEL ROCIADO EXCESIVO. NO ROCÍE EN LA ROPA, LOS MUEBLES O LA ALFOMBRA.

- A base de agua, utilice agua tibia para la limpieza.
- Se recomienda aplicar cuando la temperatura esté entre los 20 °C y 22,2 °C.
- Para obtener una textura más fina, pase la lata por agua tibia.

INSTRUCCIONES DE USO: ANTES DE LA APLICACIÓN, REPARE LA PARED SEGÚN SEA NECESARIO. PARA OBTENER MEJORES RESULTADOS, APLIQUE PINTURA BASE O SELLE EL ÁREA ANTES Y DESPUÉS DE APLICAR LA TEXTURA.

1. Agite la lata vigorosamente durante un minuto.
2. Quite la lengüeta de seguridad de la boquilla.
3. Siempre practique el rociado en cartón o un fragmento de panel de yeso para determinar la modalidad que prefiere. Aparte la boquilla de la cara y regule el selector a la modalidad deseada:
   - **EN DIRECCIÓN DE LAS MANECILLAS DEL RELOJ para una textura FINA**
   - **RECTO para una textura MEDIA**
   - **EN DIRECCIÓN CONTRARIA A LAS MANECILLAS DEL RELOJ para una textura DENSA**
4. ROCÍE a una distancia de 60,96 cm a 91,44 cm de la pared realizando movimientos circulares o de barrido rápido. Aplique realizando un diseño aleatorio que cubra sólo el 80% a 90% de la superficie. Agite la lata de vez en cuando mientras la use.
   TIEMPO DE SECADO: La textura se puede pintar cuando esté blanca, ya que esto indica que está seca (aprox. 30 min.). Las texturas más densas necesitarán un tiempo de secado más prolongado que las texturas finas.
5. Para almacenarlo, limpie la boquilla colocando la lata en posición invertida y rocíe hasta que no quede rastro de textura.

DANGER! FLAMMABLE VAPOR. CONTENTS UNDER PRESSURE. CAUSES EYE, SKIN AND RESPIRATORY TRACT IRRITATION. Contains Calcium Carbonate, Talc, Vinyl Acrylic Copolymer, Isopropyl Alcohol and Dimethyl Ether (propellent). Vapors may catch fire. Keep away from heat, sparks and flame. Extinguish all flames and sources of ignition during use and until all vapors are gone. Prevent build-up of vapors by opening all windows and doors to achieve cross-ventilation. Store upright in a cool, dry place. Avoid prolonged exposure to sunlight and other heat sources that may cause bursting. Do not puncture, incinerate, burn or store above 120°F. Use with adequate ventilation. Avoid breathing vapor and spray mist. Avoid contact with eyes and skin. Wear safety glasses or goggles. Wash hands after using. **FIRST AID:** For eye contact, flush thoroughly with water for 15 minutes and get medical attention. For skin contact, wash thoroughly with soap and water. If inhaled, remove person to fresh air. If breathing does not improve, get medical attention.

KEEP OUT OF THE REACH OF CHILDREN. WARNING: This product contains a chemical known to the State of California to cause cancer.

WARNING: If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

0 41072 04296 3

Flat Paint Product VOC <60% PWMR <1.20

This product is covered by one or more U.S. Patents.

Homax® A Premier Brand of **The Homax Group, Inc.**
Bellingham WA 98227
www.homaxproducts.com
800-729-9029
MADE IN USA

4296_32860